


■ Features :

- GaAs/GaAs Wafer
- Good Spectral Matched to Si Detector

■ Typical Applications :

- Peripheral Device
- Photo Coupler
- Photo Interrupter

■ Outline Dimensions : (Unit: μm)

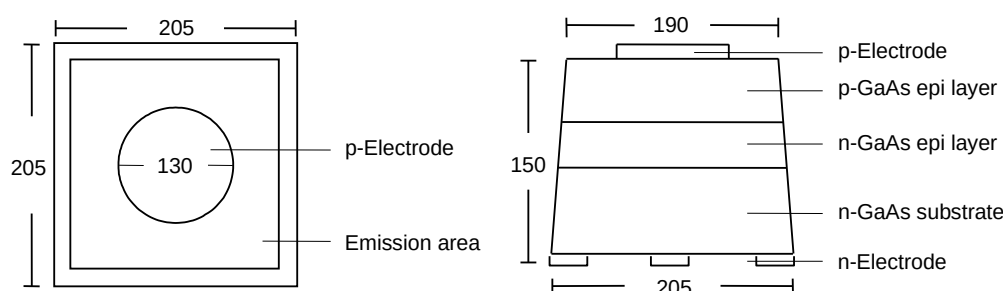

■ Physical Structure :

Chip dimension	Chip size	205 μm x 205 μm
	Thickness	150 μm
	Emission area	190 μm
	Bonding pad	130 μm
Electrode	Top: P (anode)	Gold alloy
	Backside: N (cathode)	Gold alloy
Surface condition	Smooth	

■ Electro-Optical Characteristics : ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 20 \text{ mA}$	-	1.25	1.50	V
		$I_F = 100 \text{ mA}$	-	1.48	1.90	
Reverse Voltage	V_R	$I_R = 10 \text{ uA}$	5	-	-	V
Wavelength	λ_P	$I_F = 20 \text{ mA}$	-	940	-	nm
Spectral width at half height	$\Delta \lambda$	$I_F = 20 \text{ mA}$	-	50	-	nm
Radiant Power	P_o	$I_F = 20 \text{ mA}$	0.30	-	0.6	mW

■ Typical Electro-Optical Characteristics Curve:

Fig 1. Forward Current vs. Forward Voltage

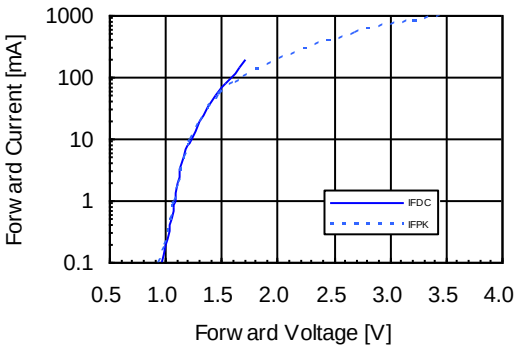


Fig 2. Relative Radiant Power vs. Wavelength

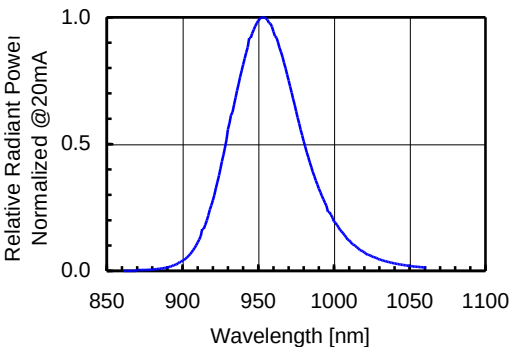


Fig 3. Relative Radiant Power
vs. Forward DC Current

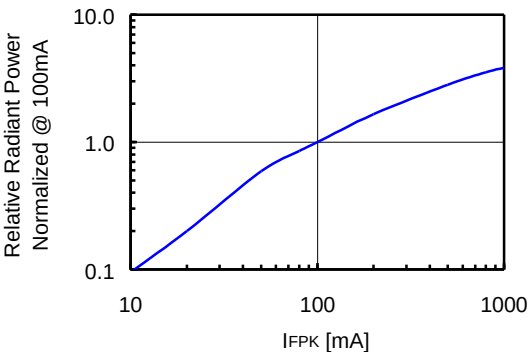


Fig 4. Relative Radiant Power
vs. Forward Peak Current

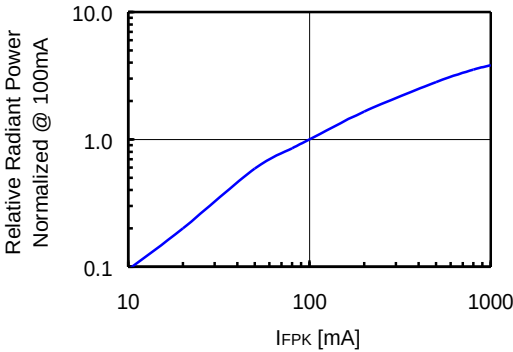


Fig 5. Forward DC Voltage vs. Temperature

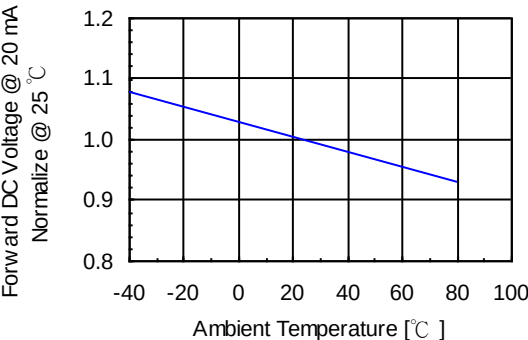


Fig 6. Relative Radiant Power vs. Temperature

